

Astronics AeroSat Corporation
60A State Route 101A
Amherst, NH 03031
Phone: 603.879.0205
Website: www.aerosat.com
E-Mail: aerosat.info@astronics.com

©Astronics Corp.

ASTRONICS
AeroSat



IN-FLIGHT CONNECTIVITY

Broadband Internet and Television, Wherever & Whenever You Need It!



ASTRONICS
AeroSat

The Better Passenger Experience.

As you step onboard your aircraft, you are immediately connected to the world of business, news, and entertainment - no waiting until you are off the ground and at altitude to get connected, and that's true whether you are in Los Angeles, Singapore, or Dubai. Wherever & whenever you fly, FliteStream's worldwide connectivity solutions enhances the value of the time you spend onboard your aircraft.

Developed specifically for business and VVIP aircraft, FliteStream provides a better passenger experience you require, including:

- **Increased Performance.** With AeroSat's patented Rexolite® lens-horn antenna technology, we eliminate typical antenna feed horns that reduce system performance. Therefore, you will experience longer periods of connectivity within each satellite beam compared to others for more consistent communications.
- **Fuselage and Tail-Mount Solutions.** FliteStream solutions come in both fuselage and tail-mount configurations without giving up performance. This ensures optimum solutions no matter what type of aircraft you operate.
- **Global Connectivity.** FliteStream operates globally utilizing any compatible Ku-band network.
- **Regional DBS-TV.** FliteStream provides global DBS-TV reception capabilities utilizing free-to-air and subscription based TV services such as Dish, DirecTV, Canalsat, Sky TV and others.
- **Worldwide Support.** AeroSat offers worldwide support to ensure maximum network up-time.
- **Open Architecture.** AeroSat's open-architecture design allows operation over any compatible Ku-band network for maximum flexibility.

Tail-Mounted Solutions



Fuselage-Mounted Solutions




Open Architecture (Customized Solutions To Fit Your Unique Needs)

Astronics AeroSat's connectivity solutions allow you to choose from multiple satellite network partners that best match your unique operational needs. Since FliteStream systems are designed to be open-architecture, this allows for optimized solutions to be constructed. Why settle for single source solutions and sub-optimal performance? Choose AeroSat FliteStream to maintain configuration flexibility and future-proofing as technology changes over time.

- **Multiple Satellite Network Providers.** FliteStream's open-architecture allows you to choose a Ku-band satellite network partner that best fits your operational needs. Don't settle for a closed satellite network, obtain truly global connectivity by choosing an open-architecture satellite network that meets your operational needs!
- **Scalable Network.** Unlike closed networks that utilize only 3 or 4 satellites, FliteStream's open-architecture takes advantage of over 150 satellites already in orbit around the earth. When closed networks reach capacity limitations, new satellites must be designed, built, and launched – a process that take years to complete. With FliteStream's open-architecture design, additional capacity can be secured quickly by adding existing satellites to the network. This rapid response time prevents “choke points” that can occur on high-usage routes found in closed-architecture networks.
- **Future-Proofed.** FliteStream's open-architecture allows the system to be upgraded and improved as technology progresses. No need to settle for a single solution that has to be scrapped due to obsolescence.

Network Coverage

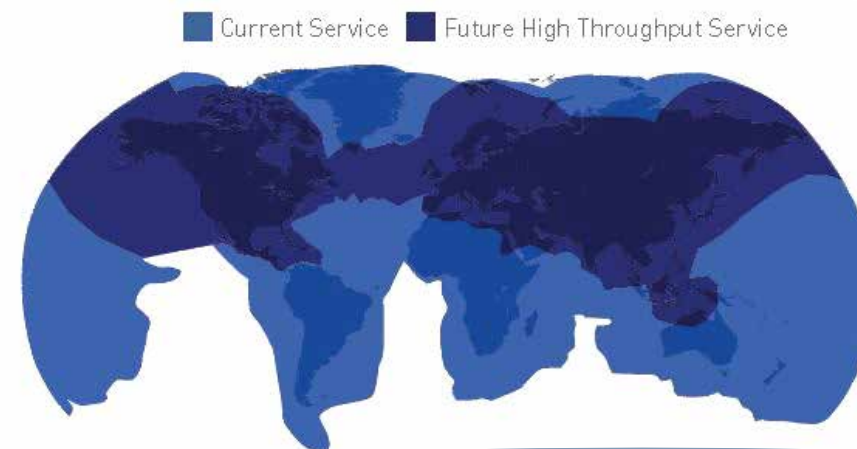

Proven Performance

- AWARD WINNING KU-BAND NETWORK ✓
- HIGH-SPEED BANDWIDTH ✓
- SYSTEM RELIABILITY ✓
- LOWEST INSTALLED COST ✓
- AVAILABLE TODAY ✓
- NEXT-GEN NETWORK UPGRADABILITY ✓

FliteStream T-210, Tail-Mounted Data & DBS-TV Solution.

Astronics AeroSat's tail-mounted T-210 solution offers broadband data and DBS-TV connectivity with unobtrusive installation locations for mid-size and larger business & VVIP aircraft.

The FliteStream T-210 system is composed of the following LRU's: 1. Tail Mount Unit (TMU) Antenna 2. Power Amplifier (PAU) 3. Antenna Control & Modem Unit (ACMU) and 4. Low Power Transceiver (LPT).

The FliteStream T-210 provides superior performance in the following areas:

- **System Efficiency (Sensitivity).** The T-210 utilizes patented Rexolite® lens-horn technology unlike other systems. This eliminates typical antenna feed horns used by all others, which block signals and reduces sensitivity.
- **High Data Speeds.** The T-210 contains the processing power to support data connection speeds in excess of 40 Mbps. The actual realized speeds obtained will be determined by the Ku-band satellite network and bandwidth packages selected for your connectivity service.
- **Antenna Size.** The T-210 antenna height and width is designed to fit anywhere existing DBS-TV antennas are used today. This allows for upgrading of the aircraft from TV-only to data & TV functionality utilizing the same radome and mounting location as the current installed system.
- **Data & DBS-TV Dual Functionality.** The T-210 is the only tail-mounted SATCOM system available that can provide both internet access and live DBS-TV from a single system. No need to have two antennas and associated weight and cost impacts of two systems.

FLITESTREAM T-210



FliteStream T-220, Tail-Mounted Data, DBS-TV, & Panasonic TV Solution.

Astronics AeroSat's tail-mounted T-220 solution offers broadband data, DBS-TV, and Panasonic TV connectivity with unobtrusive installation locations for mid-size and larger business & VVIP aircraft.

The FliteStream T-220 system is composed of the following LRU's: 1. Tail Mount Unit (TMU) Antenna 2. Power Amplifier (PAU) 3. Antenna Control & Modem Unit (ACMU) and 4. Low Power Transceiver (LPT).

The FliteStream T-220 provides superior performance in the following areas:

- **System Efficiency (Sensitivity).** The T-220 utilizes patented Rexolite® lens-horn technology unlike other systems. This eliminates typical antenna feed horns used by all others, which block signals and reduces sensitivity.
- **High Data Speeds.** The T-220 contains the processing power to support data connection speeds in excess of 40 Mbps. The actual realized speeds obtained will be determined by the Ku-band satellite network and bandwidth packages selected for your connectivity service.
- **Antenna Size.** The T-220 antenna height and width is designed to fit anywhere existing DBS-TV antennas are used today. This allows for upgrading of the aircraft from TV-only to data & TV functionality utilizing the same radome and mounting location as the current installed system.
- **Data & TV Dual Functionality.** The T-220 is the only tail-mounted SATCOM system available that can provide both internet access, live DBS-TV, and Panasonic TV from a single system. No need to have two antennas and associated weight and cost impacts of two systems.
- **Live Television, Worldwide.** Unlike other service providers, Panasonic enables passengers to watch live news and sports events as they unfold anywhere within their worldwide coverage, without impacting the Wi-Fi connection or data usage allocations.



FLITESTREAM T-220



FliteStream F-210, Fuselage-Mounted Data Solution.

Astronics AeroSat's fuselage-mounted F-210 solution offers superior technical performance required for consistent and reliable world-wide operation.

The FliteStream F-210 is composed of a fuselage-mounted SATCOM antenna installed inside of a protective radome enclosure accompanied with avionics LRU's: 1. High Power Transceiver (HPT) & 2. Antenna Control & Modem Unit (ACMU).

The FliteStream F-210 provides superior performance in the following areas:

- **LRU Count.** The F-210 solution is composed of only 3 LRU's. This increases system reliability and reduces installation weight and complexity.
- **System Efficiency (Sensitivity).** The F-210 utilizes patented Rexolite® lens-horn technology unlike other systems. This results in increased spectral efficiencies comparable to larger antenna sizes.
- **High Data Speeds.** The F-210 contains the processing power to support data connection speeds in excess of 40 Mbps. The actual realized speeds obtained will be determined by the Ku-band satellite network and bandwidth packages selected for your connectivity service.
- **Antenna Size.** The F-210 height and width is minimized for use under low profile fuselage radomes. This allows for installation into smaller aircraft locations and maximizes installation flexibility.
- **System Weight.** Because the F-210 antenna is compact and the system uses only 3 LRU's, the F-210 solution provides for the smallest system installation weight when factoring in aircraft cabling, mounting hardware, and other aircraft level installation items.
- **High Latitude Operation.** The F-210 provides a large elevation window from -10 degrees to +90 degrees unlike competing solutions. This extra elevation capability is critical for aircraft operating at high latitudes, where satellites are low in the horizon (note: this is where majority of worldwide flights occur).

FLIGHTSTREAM F-210



Contact Us Today (See How We Can Help You Get Connected!)

Astronics AeroSat Is Ready To Work With You To Create An Optimized Connectivity Solution! Contact us today and see how we can help.

Astronics AeroSat

60A Route 101A

Amherst, NH 03031

Phone: +1 (603) 879-0205

E-Mail: Aerosat.Info@astronics.com

www.aerosat.com

***Why Settle For Connectivity Outages When
FliteStream Works Where Others Can't?***

ASTRONICS
AeroSat